




Front view and mounting

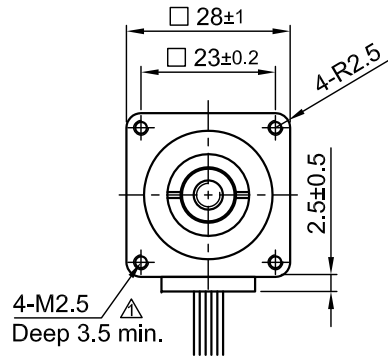

Side view

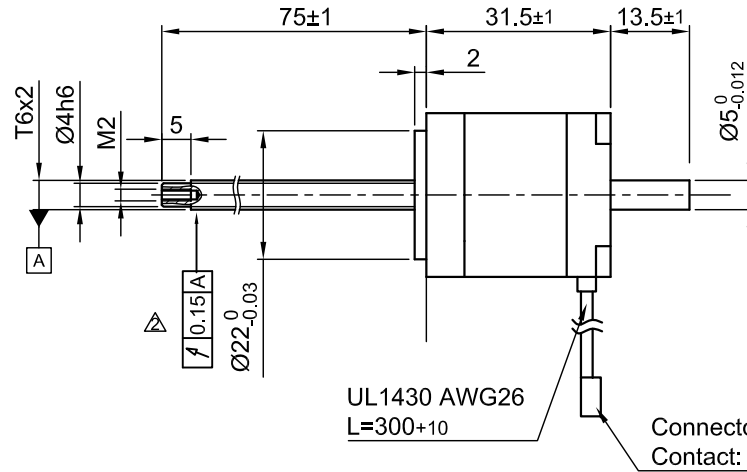

Rear view

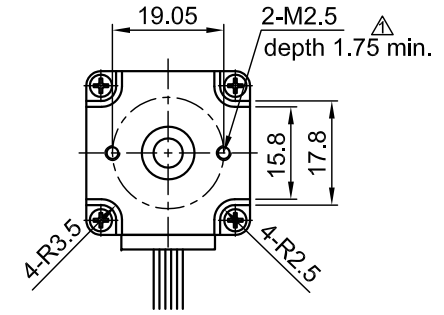

UL1430 AWG26  
L=300+10

Connector Type: JST XHP-4  
Contact: SXH-001T-P0.6


SPECIFICATION	CONNECTION	BIPOLAR
AMPS/PHASE		0.67
RESISTANCE/PHASE (Ohms)@25°C		5.6±15%
INDUCTANCE/PHASE (mH) @1KHz		4.0±20%
THRUST (N) [lbf]		60 [13.5]
RESOLUTION (mm/STEP)		0.01
STATIC THRUST (N) [lbf] (NO CURRENT)		130 [29.25]
MAX. SPEED (mm/sec.) AT 48V		20
MAX. SPEED WITH MAX. THRUST (mm/sec.) AT 48V		10
STEP ANGLE (°)+ACCURACY		1.8±5%
WEIGHT (Kg) [lb]		0.20 [0.441]
TEMPERATURE RISE: MAX.80°C (MOTOR STANDSTILL; FOR 2 PHASE ENERGIZED)		
AMBIENT TEMPERATURE -10°~ 50°C [14°F ~ 122°F]		
INSULATION RESISTANCE 100 MOhm (UNDER NORMAL TEMPERATURE AND HUMIDITY)		
INSULATION CLASS B 130° [266°F]		
DIELECTRIC STRENGTH 500VAC FOR 1 MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE)		
AMBIENT HUMIDITY MAX. 85% (NO CONDENSATION)		

Please regard the application note at [www.nanotec.com](http://www.nanotec.com) for further informations.

Shaft play is adjustable at the motor.

TYPE OF CONNECTION (EXTERN)	MOTOR		
	BIPOLAR	LEADS	WINDING
1	A —	BLK	A
2	A\ —	GRN	A\
3	B —	RED	B
4	B\ —	BLU	B\

WIRING DIAGRAM



FULL STEP 2 PHASE-Ex.,  
WHEN FACING MOUNTING END (X)

STEP	A	B	A\	B\	CCW
1	+	+	-	-	↓
2	-	+	+	-	
3	-	-	+	+	↑
4	+	-	-	+	

REV	DESCRIPTION	DATE	DRN	Surface specification DIN ISO 1302			General tolerances DIN ISO 2768- cH			Work piece edge DIN ISO 13715			APVD	G.S.	08.08.11	LINEAR AKTUATOR
02	ADD RUN-OUT	24.05.16	B.L.										CHKD	LB	08.08.11	
01	NEW TOLERANCE	07.03.16	B.L.										DRN	GYQ	08.08.11	DWG.NO
													SIGNATURE	DATE		LS2818S0604-T6x2-75