




Front view and mounting

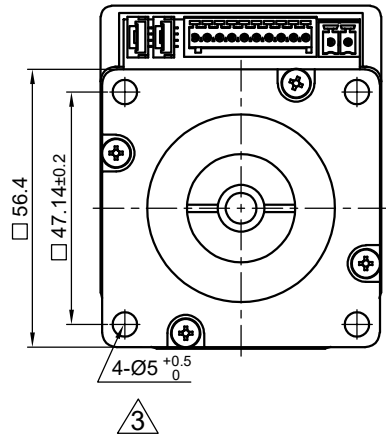


Side view

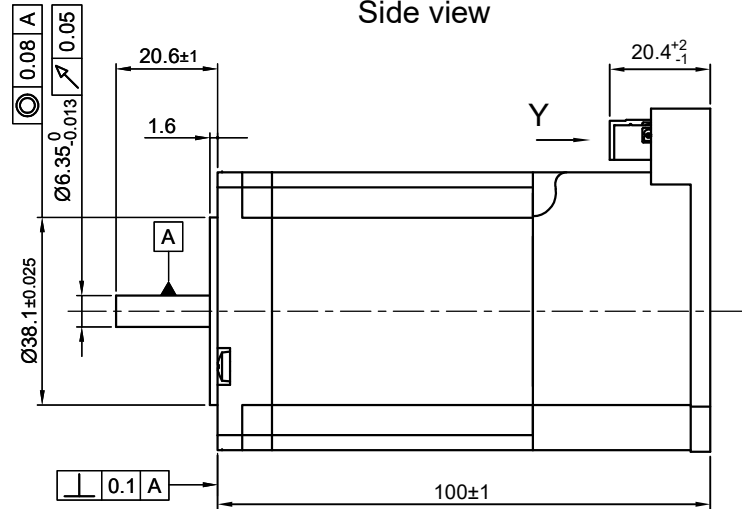

Rear view

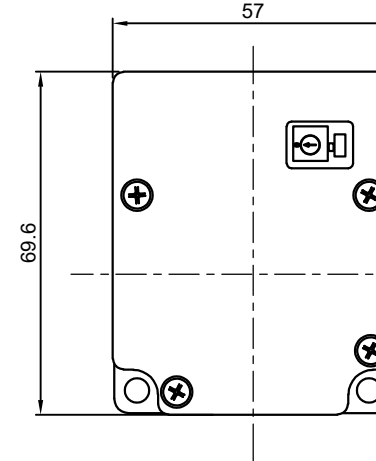

Y view

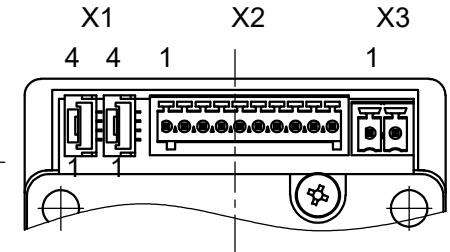

CONNECTION		SPECIFICATION		BIPOLAR		PERMISSIBLE RADIAL+AXIAL FORCE																																																															
VOLTAGE (VDC)		AMPS/PHASE(A)		HOLDING TORQUE (Nm) [lb-in]		DETENT TORQUE (Nm) [lb-in]		STEP ANGLE (°)±ACCURACY		WEIGHT (Kg) [lb]		<table border="1"> <thead> <tr> <th colspan="2">X1, JST GH-4</th> <th colspan="2">X2, Phoenix MCV-10</th> </tr> <tr> <th>PIN No.</th> <th>Function</th> <th>PIN No.</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+UB_LOGIC(24V)</td> <td>1</td> <td>GND</td> </tr> <tr> <td>2</td> <td>CAN+</td> <td>2</td> <td>Analog input (0-10V)</td> </tr> <tr> <td>3</td> <td>CAN-</td> <td>3</td> <td>+12V (Voltage Output, max.100mA)</td> </tr> <tr> <td>4</td> <td>GND</td> <td>4</td> <td>Output1 (open drain)</td> </tr> <tr> <td colspan="4">X3, Phoenix FMC-02</td> </tr> <tr> <th>PIN No.</th> <th>Function</th> <th>PIN No.</th> <th>Function</th> </tr> <tr> <td>1</td> <td>+VCC(12-48V)</td> <td>5</td> <td>Output2 (open drain)</td> </tr> <tr> <td>2</td> <td>GND</td> <td>6</td> <td>Input1 (+5/+24V)</td> </tr> <tr> <td></td> <td></td> <td>7</td> <td>Input2 (+5/+24V)</td> </tr> <tr> <td></td> <td></td> <td>8</td> <td>Input3 (+5/+24V)</td> </tr> <tr> <td></td> <td></td> <td>9</td> <td>Input4 (+5/+24V)</td> </tr> <tr> <td></td> <td></td> <td>10</td> <td>GND</td> </tr> </tbody> </table>		X1, JST GH-4		X2, Phoenix MCV-10		PIN No.	Function	PIN No.	Function	1	+UB_LOGIC(24V)	1	GND	2	CAN+	2	Analog input (0-10V)	3	CAN-	3	+12V (Voltage Output, max.100mA)	4	GND	4	Output1 (open drain)	X3, Phoenix FMC-02				PIN No.	Function	PIN No.	Function	1	+VCC(12-48V)	5	Output2 (open drain)	2	GND	6	Input1 (+5/+24V)			7	Input2 (+5/+24V)			8	Input3 (+5/+24V)			9	Input4 (+5/+24V)			10	GND
X1, JST GH-4		X2, Phoenix MCV-10																																																																			
PIN No.	Function	PIN No.	Function																																																																		
1	+UB_LOGIC(24V)	1	GND																																																																		
2	CAN+	2	Analog input (0-10V)																																																																		
3	CAN-	3	+12V (Voltage Output, max.100mA)																																																																		
4	GND	4	Output1 (open drain)																																																																		
X3, Phoenix FMC-02																																																																					
PIN No.	Function	PIN No.	Function																																																																		
1	+VCC(12-48V)	5	Output2 (open drain)																																																																		
2	GND	6	Input1 (+5/+24V)																																																																		
		7	Input2 (+5/+24V)																																																																		
		8	Input3 (+5/+24V)																																																																		
		9	Input4 (+5/+24V)																																																																		
		10	GND																																																																		
OVERTEMPERATURE PROTECTION (ELECTRONICS): 75°C		AMBIENT TEMPERATURE -10°~ 50°C [14°F ~ 122°F] (HIGHER TEMPERATURE REDUCES DUTY CYCLE)		INSULATION RESISTANCE 100 MOhm (UNDER NORMAL TEMPERATURE AND HUMIDITY)		INSULATION CLASS B 130° [266°F]		DIELECTRIC STRENGTH 500VAC FOR 1 MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE)		AMBIENT HUMIDITY MAX. 85% (NO CONDENSATION)		<table border="1"> <thead> <tr> <th colspan="2">AXIAL-FORCE Fa (N)</th> <th colspan="2">RADIAL-FORCE Fr (N)</th> </tr> </thead> <tbody> <tr> <td>AXIAL-FORCE Fa (N)</td> <td>Fa=15</td> <td>RADIAL-FORCE Fr (N)</td> <td>52</td> </tr> <tr> <td>DISTANCE a (mm)</td> <td>20</td> <td>AXIAL</td> <td>RADIAL</td> </tr> <tr> <td>SHAFT PLAY (mm)</td> <td>0.2Max</td> <td>AXIAL</td> <td>0.02</td> </tr> <tr> <td>AT LOAD MAX: (N)</td> <td>200</td> <td>RADIAL</td> <td>4.5</td> </tr> </tbody> </table>		AXIAL-FORCE Fa (N)		RADIAL-FORCE Fr (N)		AXIAL-FORCE Fa (N)	Fa=15	RADIAL-FORCE Fr (N)	52	DISTANCE a (mm)	20	AXIAL	RADIAL	SHAFT PLAY (mm)	0.2Max	AXIAL	0.02	AT LOAD MAX: (N)	200	RADIAL	4.5																																				
AXIAL-FORCE Fa (N)		RADIAL-FORCE Fr (N)																																																																			
AXIAL-FORCE Fa (N)	Fa=15	RADIAL-FORCE Fr (N)	52																																																																		
DISTANCE a (mm)	20	AXIAL	RADIAL																																																																		
SHAFT PLAY (mm)	0.2Max	AXIAL	0.02																																																																		
AT LOAD MAX: (N)	200	RADIAL	4.5																																																																		
<p>3 HOLE $\phi 5$ ADD TOLERANCE $\begin{matrix} +0.5 \\ 0 \end{matrix}$ 11.07.22 YBY</p> <p>2 NEW HOLDING TORQUE 11.10.16 GYQ</p> <p>REV DESCRIPTION DATE DRN</p>		<p>Surface specification DIN ISO 1302</p> <p>General tolerances DIN ISO 2768-cH</p> <p>Work piece edge DIN ISO 13715</p>		<p>APVD G.M. 16.05.14</p> <p>CHKD</p> <p>DRN GYQ 16.05.14</p> <p>SIGNATURE DATE</p>		<p>PLUG&DRIVE MOTOR</p> <p>DWG.NO PD4-C5918L4204-E-08</p>																																																															